
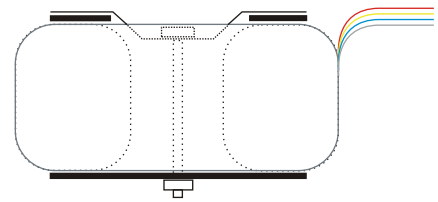
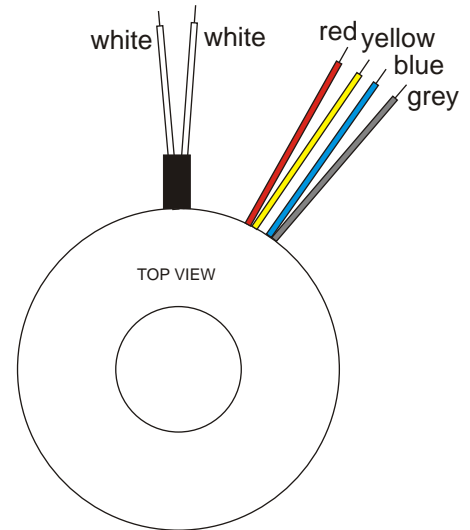
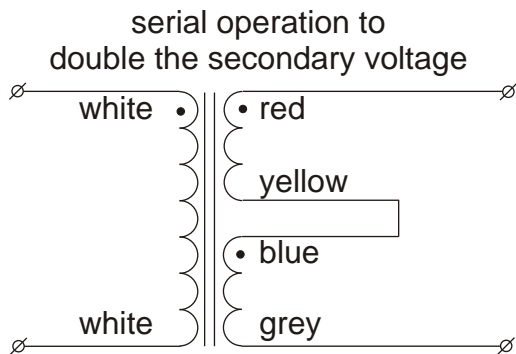
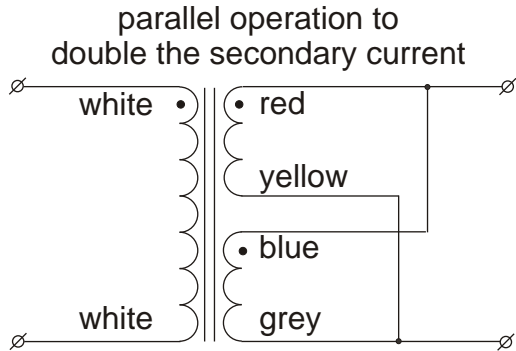


Toroidal transformer type 080xx

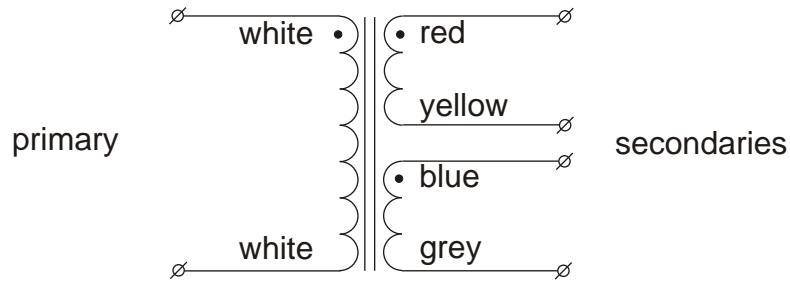

Diameter 60mm
 Height 28mm
 Weight 0.31kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø50mm
 2 neoprene washers Ø50mm
 1 bolt M5x40mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
 Primary: 0.08A, 5x20mm, IEC127, high I²t value
 Secondary: none

Type number	primary	secondaries	
		voltage	current
08010	230V	2x 6V	1.25A
08011	230V	2x 9V	0.83A
08012	230V	2x 12V	0.63A
08013	230V	2x 15V	0.50A
08014	230V	2x 18V	0.42A
08015	230V	2x 22V	0.34A
08016	230V	2x 25V	0.30A
08017	230V	2x 30V	0.25A

All voltages are under full ohmic load.
 Regulation : 19%



Vossenbrinkweg 1
 NL-7491DA DELDEN
 The Netherlands

P O - B o x 2 4
 NL-7490AA DELDEN
 The Netherlands
 Tel.+31 (0)74 376 3765
 Fax+31 (0)74 376 3132

info@amplimo.nl
 http://www.amplimo.nl

HB

April 2003

© Copyright Amplimo BV

080xx

**toroidal transformer
 range 15VA**