
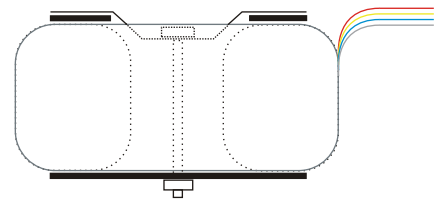
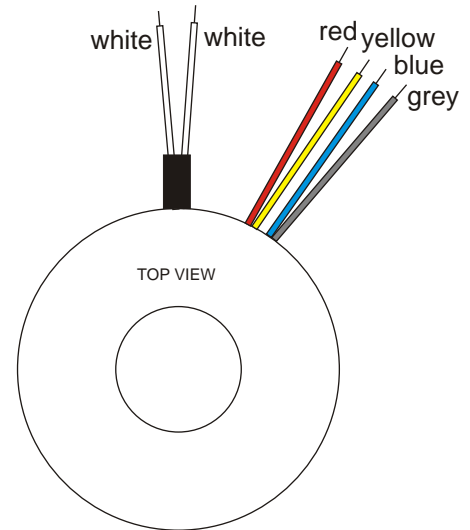
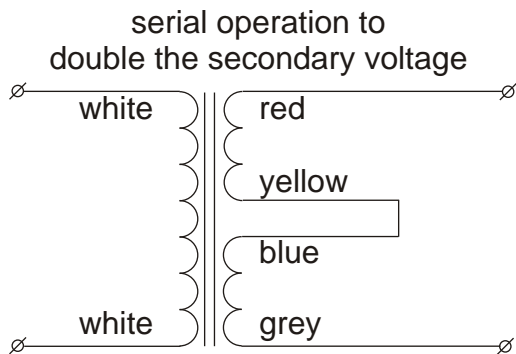
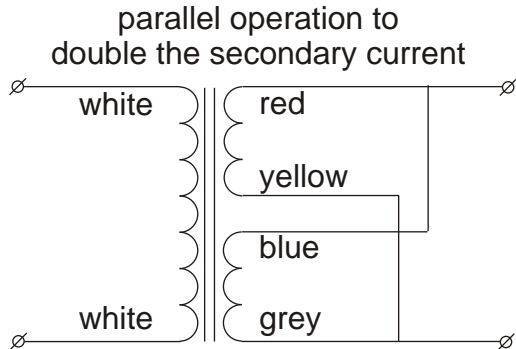


## Toroidal transformer type 180xx

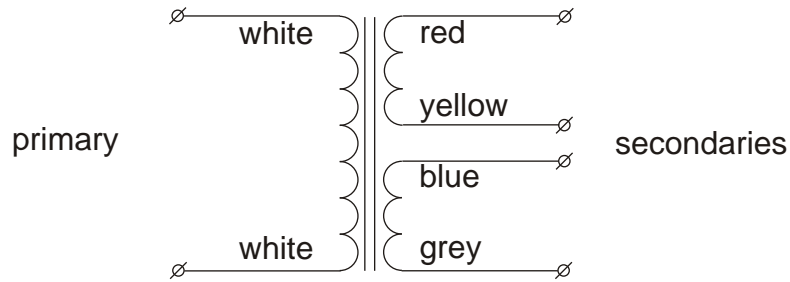

Diameter 70mm  
 Height 32mm  
 Weight 0.44kg  
 Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

Supplied mounting materials:  
 1 metal washer Ø50mm  
 2 neoprene washers Ø50mm  
 1 bolt M5x40mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
 KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.  
 Primary: 0.16A, 5x20mm, IEC127, high I<sup>2</sup>t value  
 Secondary: none

Type number	primary	secondaries	
		voltage	current
18010	230V	2x 6V	2.50A
18011	230V	2x 9V	1.66A
18012	230V	2x 12V	1.25A
18013	230V	2x 15V	1.00A
18014	230V	2x 18V	0.83A
18015	230V	2x 22V	0.68A
18016	230V	2x 25V	0.60A
18017	230V	2x 30V	0.50A

All voltages are under full ohmic load.  
 Regulation : 17%



Vossenbrinkweg 1  
 NL-7491DA DELDEN  
 The Netherlands

P O - B o x 2 4  
 NL-7490AA DELDEN  
 The Netherlands  
 Tel.+31 (0)74 376 3765  
 Fax+31 (0)74 376 3132

info@amplimo.nl  
<http://www.amplimo.nl>

HB

April 2003

© Copyright Amplimo BV

**180xx**

**toroidal transformer  
 range 30VA**